



### Dimensions

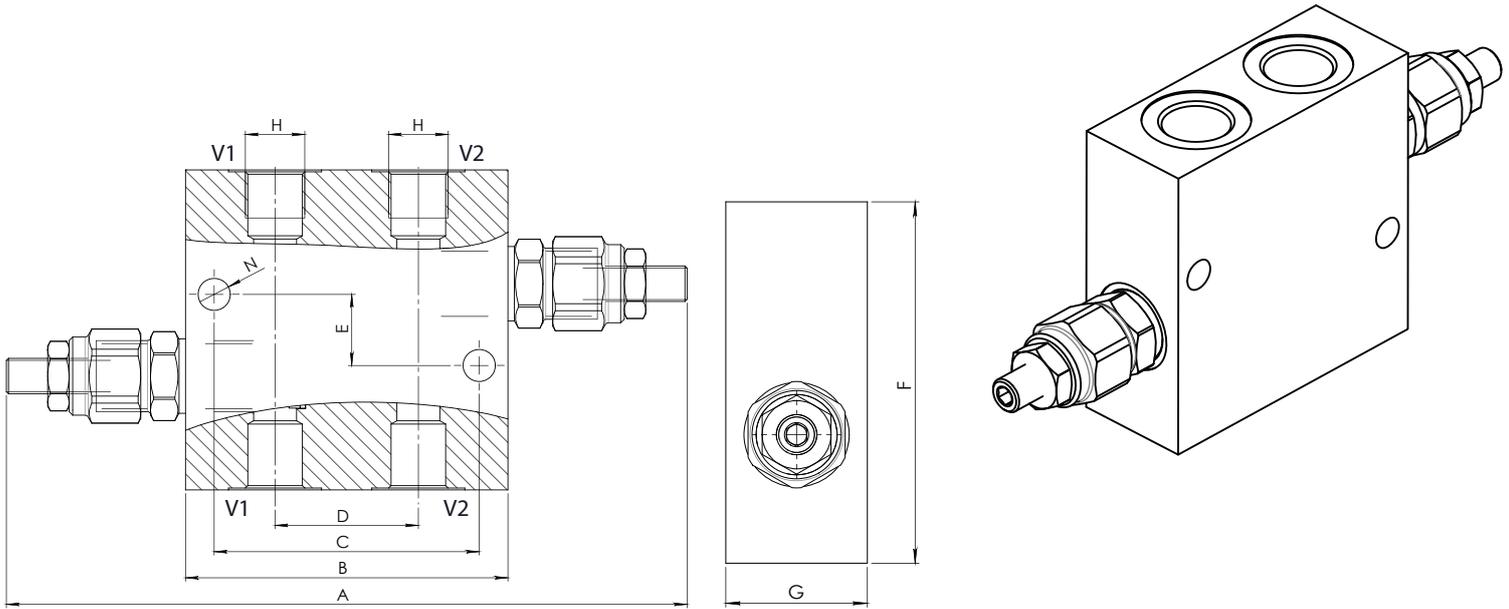


Size	A	B	C	D	E	F	G	H BSP	N	Weight kg
<b>02</b>	190	90	74	40	20	90	35	3/8	9	0,95
<b>03</b>	190	90	74	40	20	90	35	1/2	9	0,93

### Hydraulic Symbol

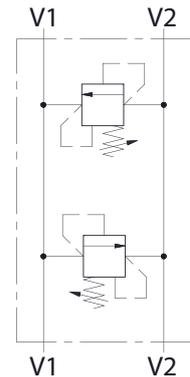

### Curves

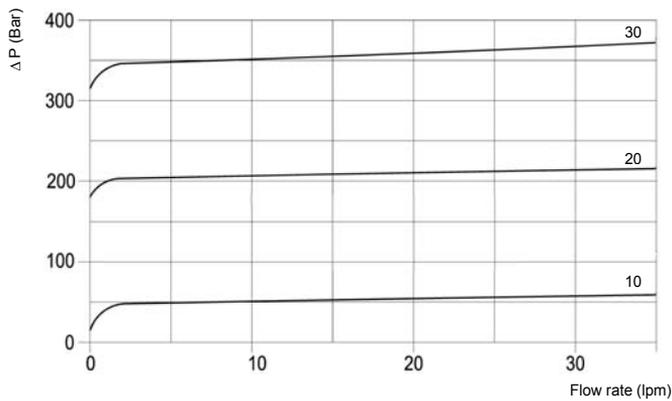

### Features

<b>Rated Flow</b>	35 lpm
<b>Max Pressure</b>	350 bar

**Materials:** Zinc plated steel cartridge, hardened steel inner parts.  
Aluminium manifold.

### Ordering Code

**DPRL 35**    --    --    -

Port Size BSP		Spring (bar)	
<b>02</b>	3/8	<b>10</b>	5-50
<b>03</b>	1/2	<b>20</b>	40-210
		<b>30</b>	100-350

### Adjustments

<b>A</b>		Socket Screw
<b>B</b>		Handknob
<b>C</b>		Tamperproof Cap

**Ordering Code Example:** DPRL350220A = 3/8 Port Size - 40-210 bar setting range, Socket screw adjustment.