Medium Pressure






Technical Performance Data


Body Size inch	Temperatur Range	Maximum operating pressure
1/2"	-30°C up to +110°C	250 bar

Connecting box (Coupling Plate)

Complete unit including the base connector unit, its dust cover, a lever acting as a central locking device and 2 female couplings.



Complete unit including the connecting plug and 2 male tips, which meet the requirements of ISO 7241-1-A.



Technical Description

The couplings meet requirements of ISO 7241-1 Series A. Possibility to connect 2 hydraulic lines simultaneously. No coupling misconnection or accidental disconnection. Possibility of connecting under pressure up to 250 bar in one hydraulic line only.

Advantages

Central came locking system. Poppet style valving with a molded shaped seal to prevent seal washout at high flow rates.

Applications

- Agricultural (front loaders, hedge cutters,...)
- Road service vehicles (road systems lorries, road sweepers, snowploughs,...)
- Industrial Applications


Working Pressure

max. 250 bar

Working Temperature

-30°C up to +110°C (NBR) depending on the medium.


Flow Capacity with Oil with Viscosity of 43cSt at 38°C as per ISO 7241/2-2000



Material		
Protective Cap	Thermoplastic	
Quick Connect Couplings/-Plugs	Steel	
Seals	NBR	
Locking Mechanism	Steel	
Casting Boxes	Steel	


Installation

Mechanical attachment: 2 mounting holes Ø 8,5 mm




	1/2"
Α	100 mm
В	80 mm
С	55 mm
D	125 mm

MACH 2-Series **Coupling Plate**

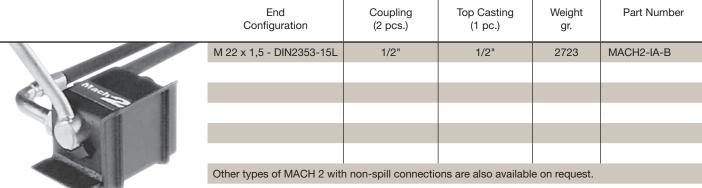

Please consult us for further information.

Plug Plate MACH 2-Series

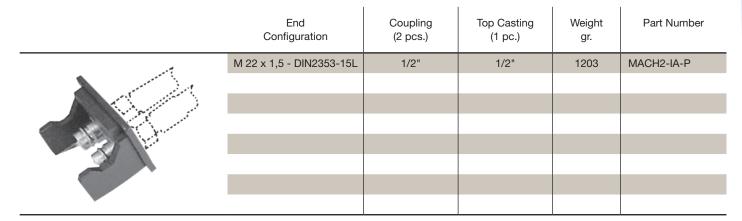

Spare Parts

Description	Part Number
Coupling seal	JT020117N0552
Coupling	LV54D6X5MLXC
Plug	LV14E6X5MLX