



Mechanical actuator for miniature solenoid valve

Ordering code


- M 2** Normally Closed (N.C.)
M 2P Normally Closed (N.C.) threaded lock nut
M 2/9 Normally Closed (N.C.) 2 W 24 VDC




Weight 51 g

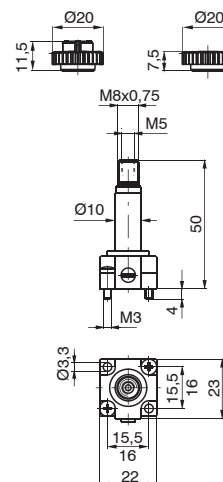

- M 2/1** Normally Open (N.O.) air feeding through fix flunger




Weight 48 g

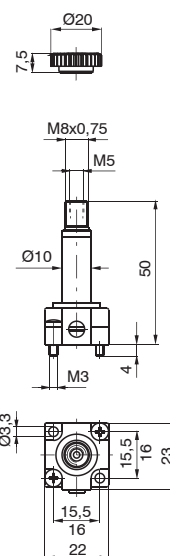


- Normally Open (N.O.) air feeding through base

MM 7



Weight 46 g

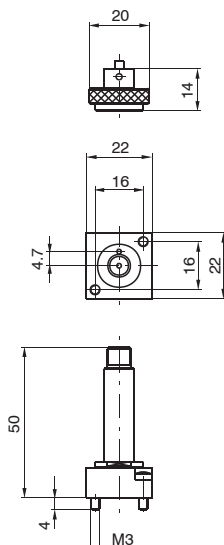

Ordering code	Available voltages Coil	
N.O.		
MB10/1	24 D.C. (8 Watt)	Direct current
MB17/1	24/50	Alternating current 50 Hz
MB21/1	48/50	
MB22/1	110/50	
MB24/1	230/50	
MB37/1	24/60	Alternating current 60 Hz
MB39/1	110/60	
MB41/1	230/60	
MB56/1	24/50-60	Alternating current 50/60 Hz
MB57/1	110/50-60	
MB58/1	230/50-60	