

Solenoid-Spring (Self feeding)

Coding: T488.●.0.1.●


Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (l/min)	620
Orifice size (mm)	6
Working ports size	G 1/8"
Response time according to ISO 12238, activation time (ms)	23,4 (3 ways) 22,8 (5 ways)
Response time according to ISO 12238, deactivation time (ms)	41,0 (3 ways) 44,5 (5 ways)

TYPE	
①	32 = 3 ways, 2 positions 52 = 5 ways, 2 positions
VOLTAGE	
●	M9 = 24 V D.C. M11 = 24 V D.C. M56 = 24 V 50/60 Hz M57 = 110 V 50/60 Hz M58 = 230 V 50/60 Hz





Weight 160 g
Minimum working pressure 2,5 bar

T488.32.0.1.●

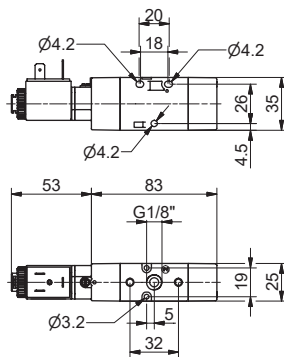

Weight 190 g
Minimum working pressure 2,5 bar

T488.52.0.1.●

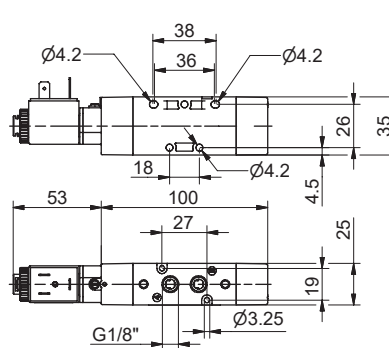

Solenoid-Spring (External feeding)

Coding: T488.●.0.1E.●


Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +50
Flow rate at 6 bar with $\Delta p=1$ (l/min)	620
Orifice size (mm)	6
Working ports size	G 1/8"
Response time according to ISO 12238, activation time (ms)	23,4 (3 ways) 22,8 (5 ways)
Response time according to ISO 12238, deactivation time (ms)	41,0 (3 ways) 44,5 (5 ways)

TYPE	
①	32 = 3 ways, 2 positions 52 = 5 ways, 2 positions
VOLTAGE	
●	M9 = 24 V D.C. M11 = 24 V D.C. M56 = 24 V 50/60 Hz M57 = 110 V 50/60 Hz M58 = 230 V 50/60 Hz



Weight 160 g
Minimum working pressure 2,5 bar

T488.32.0.1E.●

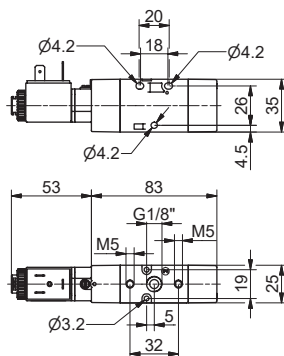

Weight 190 g
Minimum working pressure 2,5 bar

T488.52.0.1E.●

