



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

 Creation Date:
 03/08/2018

 Datasheet No:
 DS783W

 Parker Part No:
 PR2863Q


 OEM:
 Mahle

 OEM Part No:
 Pi3130SMX10

- Todact Difficitsions			
A (mm)	83.5	(inch)	3.29
B (mm)	47.5	(inch)	1.87
D (mm)	83.5	(inch)	3.29
E (mm)	256.0	(inch)	10.08

Product Dimensions

onstruction Materials

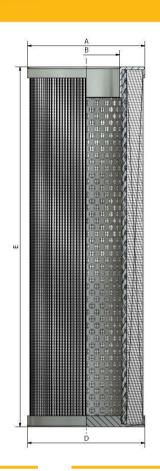



Construction waterials			
Top Endcap:	Mild steel tin plated		
Bottom Endcap:	Mild steel tin plated		
Inner Support Cylinder:	Mild steel tin plated		
Filter Media:	Multilayer fibreglass with coated mesh on both sides		

Calculated Performance Criteria

 Differential Pressure (Δp):
 0.33 bar @ 400 l/min

 Tested to ISO3968 @ 32 cSt
 4.79 psi @ 87.99 gpm

Efficiency: >Beta 200 @ 10 microns & greater

>Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >20 bar Tested to ISO2941 >290 psi

Dirt Holding Capacity acc. to ISO16889

52.1 gram @ 7 bar terminal pressure drop 52.1 gram @ 102 psi terminal pressure drop

