



## RLR70E20B

printed on: 19-03-2026

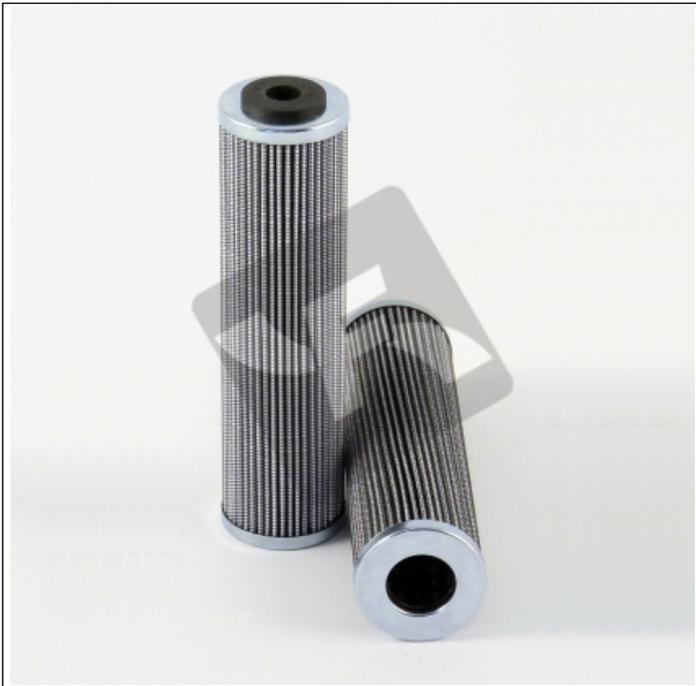

### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse $\Delta p$	16 bar
Bypass setting	2.0 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	PROVIDED WITH SPARE OR GASKET

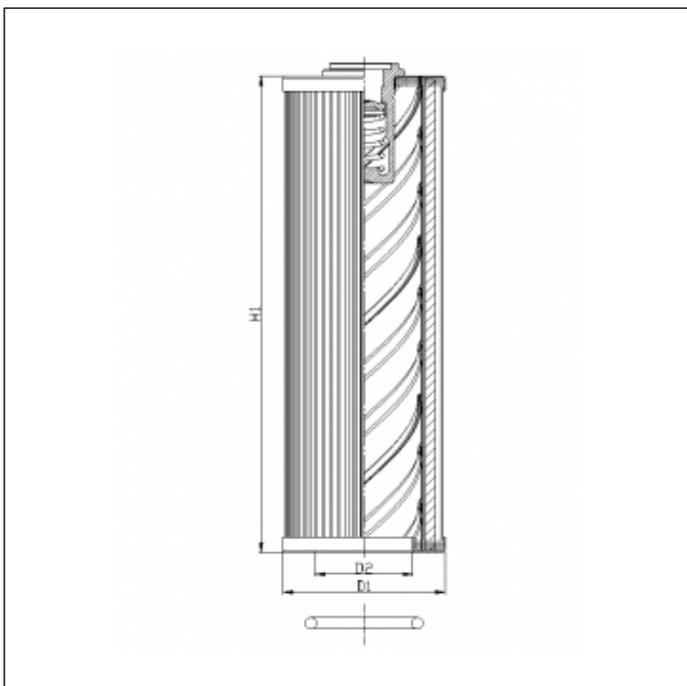

### OVERALL DIMENSIONS

D1	45,0 mm
D2	23,0 mm
H1	167,0 mm