


RLR950E03B

printed on: 01-03-2026

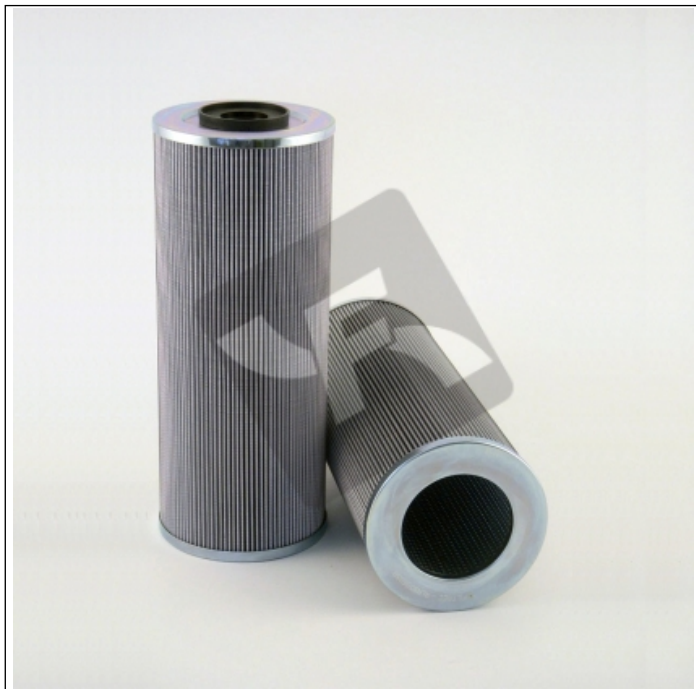

TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	$<4 \mu\text{m}_{(c)} \beta_x \geq 200$
Efficiency 1	$5 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	10 bar
Bypass setting	2.0 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	PROVIDED WITH SPARE OR GASKET

OVERALL DIMENSIONS

D1	142,0 mm
D2	85,0 mm
H1	349,0 mm

