











ST 200 AC

FEATURES

- · STURDY METALLIC FRAME
- READY TO USE
- EASY TO MOVE HEAVY DUTY

The PIUSI ST 200 AC is a dispenser that allows high flow refueling thanks to the two integrated E12O self-priming rotary electric vane pumps. Fitted with bypass valve and elevated reliability seal, the dispenser works even at low working temperatures and in every condition on worksites. The oval gear mechanical flow meter guarantees great precision (available on request). It is also available with wheels and handle (on request) for easier handling.

PERFORMANCE

UP TO 200 L/MIN

FLOW RATE

AC **CONTINUOUS DUTY** POWER



ST 200 AC





HANDY KIT: VERSION WITH WHEELS AND HANDLE

PACKAGING											
	WE	IGHT	PACKAGING								
CODE	KG	LBS	ММ	INCH	PCS/BOX						
F00315000	46	101	587X395X42O	23,1X15,6X16,5	1						
F16860000	-	-	-	-	-						













TANK MONITORING

HOSE REEL

ACCESSORIES

MERCHANDISE

























ANTIFREEZE

AdBlue®

BIODIESEL

DIESEL

FOOD

GASOLINE


GREASE

KEROSENE



WINDSCREEN

CHART

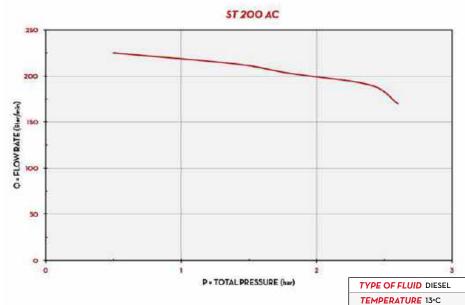


IN THE BOX


- · ST 200 AC UNIT
- INSTRUCTION MANUAL

DETAILS



DIMENSIONS





MATERIALS

- · BODY: CAST IRON
- ROTOR: SINTERED STEEL
- · VANES: ACETAL RESIN
- SEAL: VITON
- SHAFT: STEEL

Dimensions expressed in millimeters

TECHNICAL DATA												
CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE		PUMP		MAX PRESSURE	OUTLET		
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.	TYPE	N°	BAR	BSP	
F00315000	ST 200 BASIC	0	200	52,7	230/50	2050	10	E 120	2	2,5	1" 1/2	
F16860000	HANDY KIT (HANDLE + WHEELS)	0	-	-	-	-	-	-	-	-	-	

ST200 AC