


## U111G06V/ESD

printed on: 29-07-2023



### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	5 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	7 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	IN-OUT
Burst $\Delta p$	10 bar
Seals	FKM
Temperature range	-25°C +120°C
Note	ANTI-ESD FILTER ELEMENT

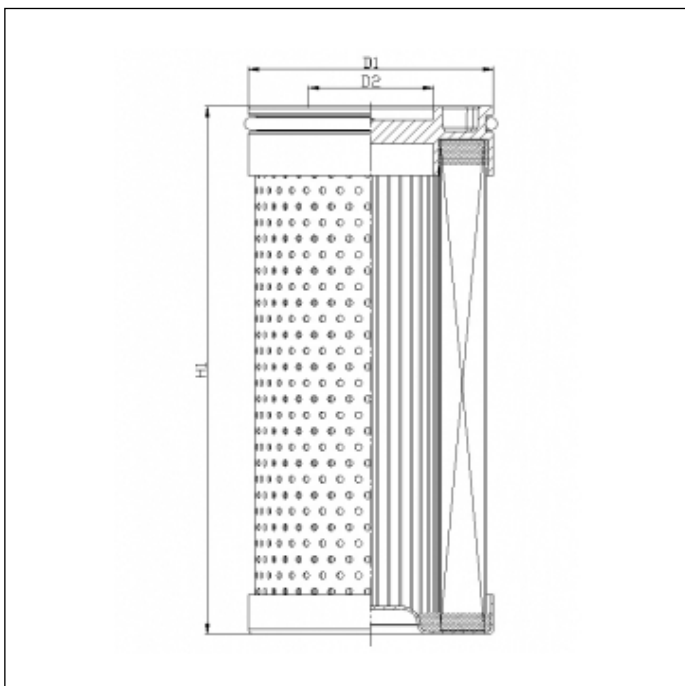

### OVERALL DIMENSIONS

D1	53,0 mm
D2	27,0 mm
H1	215,0 mm

Technical information may change without notice. Image and drawing are representative only