
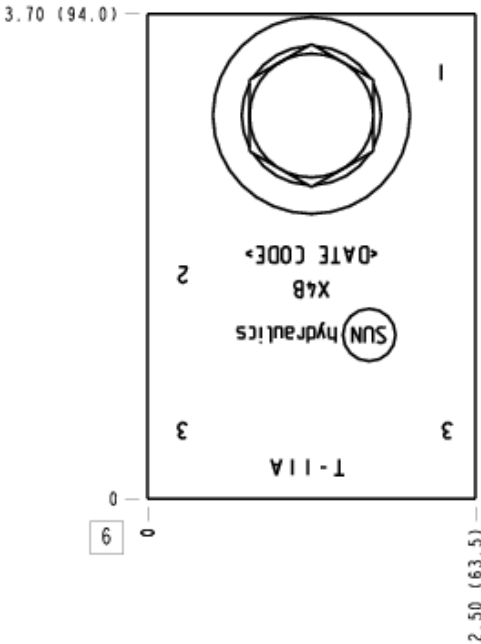




TECHNICAL DATA

Body Type	Line mount
Interface	Banjo Bolt
Body Features	Through port 3
Banjo Bolt Installation Torque	53 lb. ft. to 58 lb. ft. (70 Nm to 77 Nm)
Banjo Bolt Hex	.94
Open Cavities	1
Cavity	T-11A
Port Size	3/8" BSPP
Model Weight	0.55 kg.

NOTES *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
X4B, /10, /11, /S, /S3	All Ports: 3/8" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
330-073-002	Connector	1
505-012-002	O-Ring	1

CONFIGURATION OPTIONS

Model Code Example: X4B

MODIFIER


- 6061-T651 Aluminum, Buna-N
- /11 6061-T651 Aluminum, Buna-N, Clear
Anodize - Per MIL SPEC 8625F Type II, Class I
- /10 6061-T651 Aluminum, Buna-N, Black
Anodize - Per MIL SPEC 8625F Type II, Class II
- /S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- /S4 65-45-12 Ductile Iron, Buna-N, Chem. Black
- /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 5

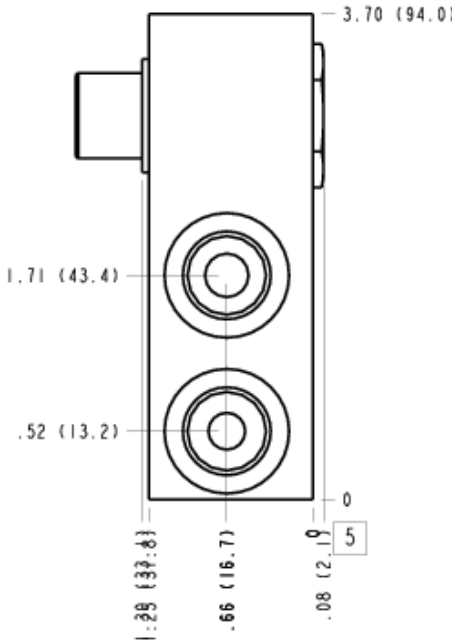


Face 6

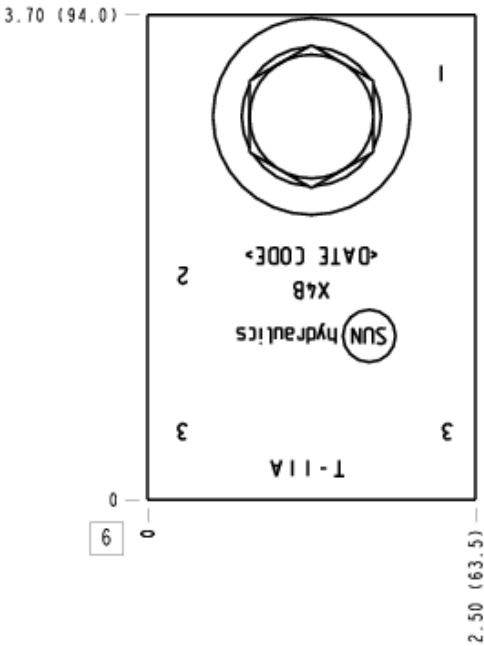

Face 7

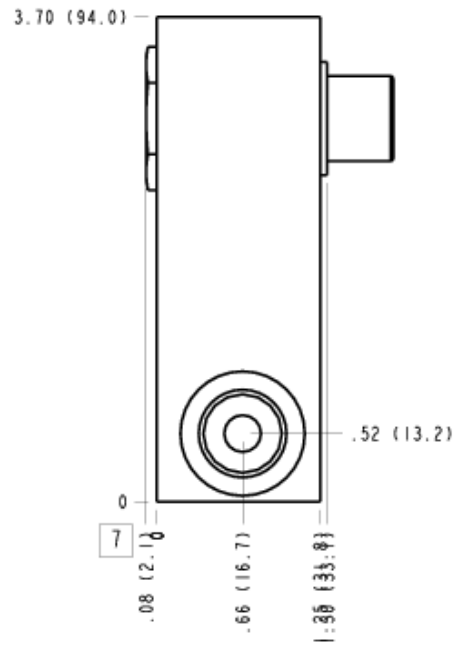

Face 8

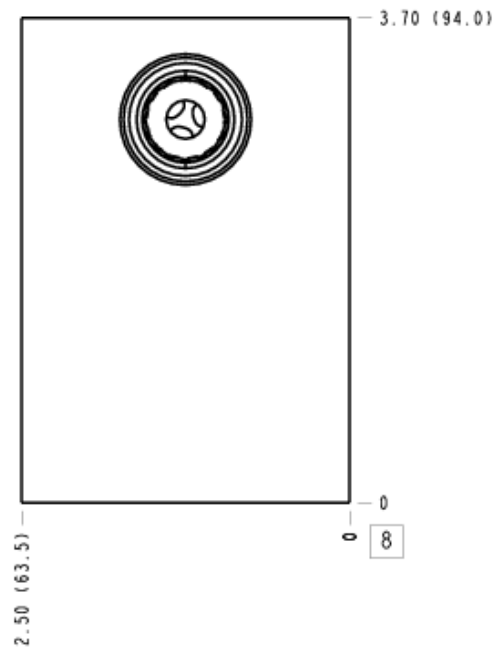

Face 10

