
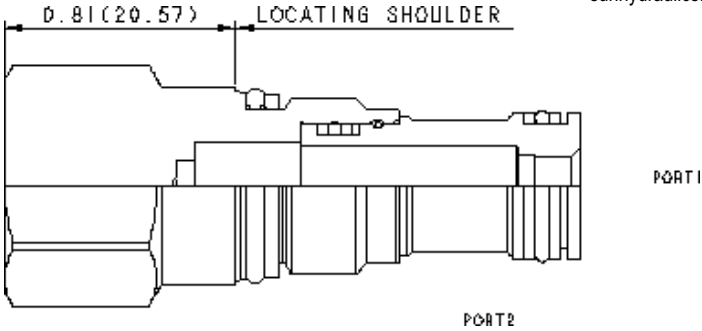




CONFIGURATION

X	Control	-
X	Adjustment Range	-
N	Seal Material	Buna-N
(none) Material/Coating		

This cavity plug blocks all ports.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-162A
Series	0
Maximum Operating Pressure	350 bar
Port Configuration	2 Port
Valve Hex Size	19,1 mm
Valve Installation Torque	27 - 33 Nm
Seal kit - Cartridge	Buna: 990162007
Seal kit - Cartridge	Polyurethane: 990162002
Seal kit - Cartridge	Viton: 990162006
Model Weight	0.07 kg.

CONFIGURATION OPTIONS

Model Code Example: **XZCAXXN**

CONTROL	(X)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)	MATERIAL/COATING
X -		X -		N Buna-N		Standard Material/Coating
E External 4-SAE Port				E EPDM		/AP Stainless Steel, Passivated
				V Viton		/LH Mild Steel, Zinc-Nickel

RELATED MODELS

- [XZCA8](#) T-162A cavity to T-8A cavity converter